

# COMPACT SERIES

»» SFX-L

400W



Features :

- PFC Type : Active PFC
- 80 Plus Gold Certified : Offer 90% minimum efficiency at 50% load
- Cable management : Fully modular
- Extremely Silent Solution : Single 120mm fan on top
- Dimension : 125mm (W) x 130mm (D) x 63mm (H)




**COMPACT SERIES**
**SFX-L**
**400W**

Product Name		SFX-L 500 GD	SFX-L 400 GD
Model Number		HPN-500GD-F12S	HPN-400GD-F12S
Input	Voltage	100-240V	100-240V
	Current	7A	6A
	Total Watts	500W	400W
Output	+5V	20A	18A
	+3.3V	20A	18A
	+12V	40A	33.4A
	-12V	0.3A	0.3A
	+5Vsb	3A	3A
	+5V+3.3V	105W	95W
	+12V Combined	480W	400W
Connectors	20+4pin	1	1
	CPU 4Pin	0	0
	CPU 4+4Pin	1	1
	CPU 8Pin	0	0
	PCI-E 6+2pin	2	1
	PCI-E 6pin	0	0
	SATA	4	4
	HDD	2	2
	FDD	0	0
Dimension (W / D / H)		125x130x63mm	125x130x63mm
Fan Bearing		Sleeve	Sleeve
Fan Size(cm)		12cm	12cm
Modular Cable		Fully modular	Fully modular
Off-delay Fan		-	-
LED Power Meter		-	-
D-VRM		-	-
Japanese Capacitors		V	V
Solid- state Capacitors		V	V
Double -sided PCB		V	V
Flat Cable		-	-
+12V Rail		1 Rail	1 Rail
Protection		UVP/OVP/OPP/SCP	UVP/OVP/OPP/SCP
Safety		FCC,CE, cTUVus, TUV,CB,CCC	FCC,CE, cTUVus, TUV,CB,CCC
80 PLUS		GOLD	GOLD




Cable management :


20+4 Pin




CPU 4+4 Pin



PCI-E 6+2 Pin



SATA  
HDD

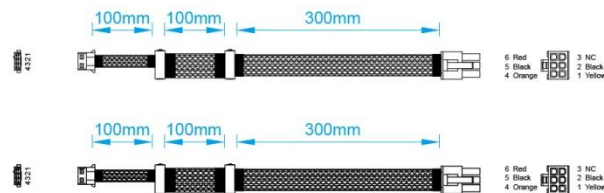

Modular Cables

20+4pin	CPU 4+4Pin	PCI-E 6+2Pin	SATA	HDD
1	1	1	4	2